



Colores • Colors • Couleurs • Farben / Largo • Width • Laise • Breite: ★300 cm

Muestra • Sample

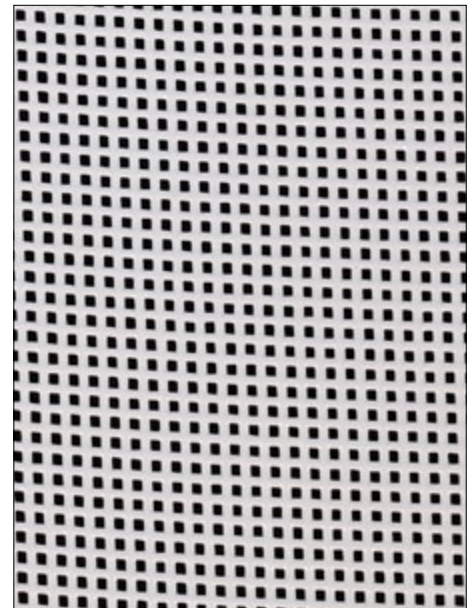

* Consultar disponibilidad o pedido mínimo * Check availability or minimum order * Consulter disponibilité ou minimum de commande * Konsultieren Sie Verfügbarkeit oder Mindestbestellmenge

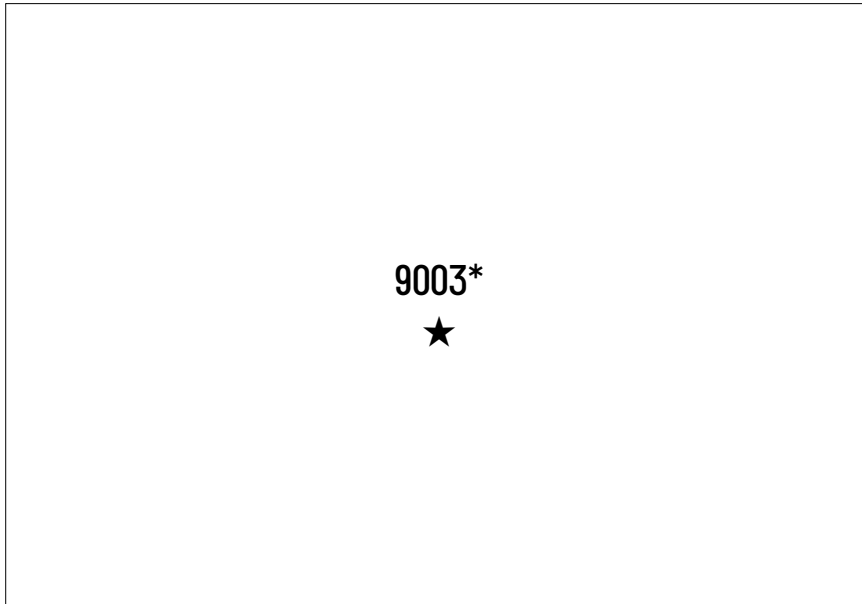

SERVICIOS

- Corte de piezas
- Metreado
- Colores personalizados
- Libre de aftalatos
- Anchos personalizados

SERVICES

- Roll slitting
- Metered rolls
- Customized colours
- Phtalate free
- Customized widths





SERVICES










- Découpe de pièces
- Métrage
- Couleurs personnalisées
- Sans aftalates
- Découpe de pièces

DIENSTLEISTUNGEN

- Zurechtschneiden von Stücken
- Meterware
- Farbe nach Kundenwunsch
- Phthalatfrei
- Kundenspezifische Breiten

Características técnicas • Technical features • Caractéristiques techniques • Technische Daten

Material base • Base material Matériel de base • Trägergewebe	 100% PES
Hilos • Yarn count Fil • Garn	 1670 dtex
Tipo de recubrimiento • Type of coating Type d'enduction • Beschichtungsart	 PVC
Acabado • Finish Finition • Endausrüstung	 Rejilla • Mesh • Grille • Nets

Especificación • Specification Spécification • Spezifikation		Unidades • Units Unités • Einheiten	Método • Test Method Méthodes • Methode	Nominal • Target Nominal • Wert	
	Gramaje • Total weight Poids Total • Flächengewicht	g/m ²	EN ISO 2286-2	670	
	Resistencia Tracción • Tensile strength Résistance Rupture • Reißfestigkeit	URDIBRE • WARP CHAÎNE • KETTE	daN/5cm	EN-ISO-1421	260
		TRAMA • WEFT TRAME • SCHUSS	daN/5cm	EN-ISO-1421	250
	Resistencia Desgarre • Tear strength Résistance Déchirure • Weiterreißfestigkeit	URDIBRE • WARP CHAÎNE • KETTE	daN	DIN-53363	60
		TRAMA • WEFT TRAME • SCHUSS	daN	DIN-53363	50
	Adherencia 23°C • Adhesion 23°C Adhérence 23°C • Haftung 23°C	daN/5cm	EN ISO 2411	10	
	Temperaturas máximas • Temperature resistance Températures extrêmes d'utilisation • Temperaturbeständigkeit	°C	EN 1876	-30/+70	
	Ancho • Width Laise • Breite	cm	EN ISO 2286-1	300	
	Tratamiento antifúngico • Antifungus treatment Traitement anti-moisissures • Fungizid Ausgerüstet			OK	
	Reacción al fuego • Flame retardant Réaction au feu • Brenverhalten	mm	UNE 23727-90	M2	
	Espesor • Thickness Grosueur • Dicke	mm	EN ISO 2286-3	1,15	



La información facilitada corresponde a valores promedio de un producto recién fabricado con un rango de tolerancia de +/-10 %, se facilita como indicación y guía solamente, sin ninguna vinculación jurídica. Los valores proporcionados se refieren al estado original de la mercancía enviada antes del procesamiento o elaboración por parte del cliente. Por razones técnicas puede haber ligeras variaciones durante la producción, así como pequeñas alteraciones del color, las referencias al RAL son solo indicativas. El cliente como propietario del diseño debe comprobar la aptitud y compatibilidad del producto para el uso previsto antes de proceder a su procesamiento o elaboración.

The information provided corresponds to average values of a newly manufactured product with a tolerance range of +/- 10% which is provided as an indication and guidance only, without any legal binding. The values provided refer to the original status of the goods sent before processing or handling by the customer. For technical reasons there may be slight variations during production, as well as slight color alterations, the RAL references are only indicative. The customer as owner of the design must check the aptitude and compatibility of the product for the intended use before proceeding with its processing or elaboration.



ACREDITADO POR ENAC

INDUSTRIAL **SEDÓ**

Desde 1889



+34 977 65 50 07

info@industrialsedo.com

www.industrialsedo.com

Industrial Sedó, S.L.

Camí Mas Llagostera S/N

43762 La Riera de Gaià

(Tarragona) Spain

www.industrialsedo.com



ACREDITADO POR ENAC